




**WARNING:** Please take the time to read through the ENTIRE instructions prior to starting any work. Not following the instructions will invalidate the warranty.

## TOOLS REQUIRED:

- 2" x 4" Lumber
- #8 x 1 5/8" Truss Drywall Screws
- Crow Bar
- Drywall Saw
- Drywall Screws
- Flashing Tape
- Hammer
- Level/Plumb Bob/Square
- Plywood/Drywall
- Reciprocating Saw
- Roofing Material/Shingles
- Roofing Felt
- Safety Glasses
- Sealant & Gun
- Tape Measure
- Utility Knife

**Curb Mount Glass  
Skylight**

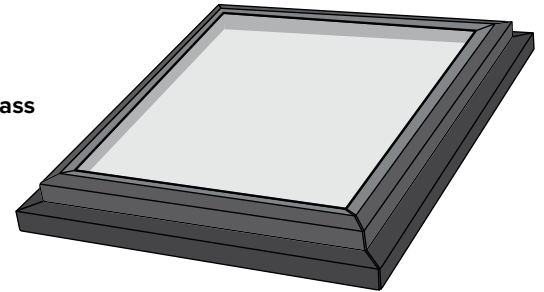

## IMPORTANT PRECAUTIONS:

Skylights are subject to condensation caused by warm moist air rising from the room below. Insulate the light shaft and other areas surrounding skylight to minimize condensation. In some cases, the light shaft may require special ventilators to remove moist air.

- Be sure the skylight remains adequately supported by the roof if either headers or rafters are setback from edge of the rough opening to prevent roof failure and possible injury.

## IMPORTANT WARNINGS:

- Do not cut roof trusses. If trusses must be cut, obtain expert guidance from an architect, structural engineer, or roof truss manufacturer. Work from professionally prepared plans.
- Support the roof with braces before cutting rafters, to prevent roof failure which can cause severe injury and structural damage.
- Obtain guidance from an architect or structural engineer, if more than one rafter is cut to prevent roof failure and possible injury.

## IMPORTANT SAFETY NOTES:

- Remove nails and other obstructions to prevent them from being thrown while cutting.
- Be sure electrical wires, pipes, and other building components will not be cut or damaged.
- Wear eye protection and follow safety procedures recommended by the saw manufacturer.
- To avoid injury or damage, use blocks or bracing to prevent cutout section from dropping as it is freed.
- Stay clear of cutting area while sawing; be especially careful of hand placement and falling debris on the interior, underneath the work area.

## STANDARD SKYLIGHT SIZING CHART


MODEL	ROUGH OPENING width x length	OUTSIDE CURB width x length
1430	14.5" x 30.5"	17.5" x 33.5"
1446	14.5" x 46.5"	17.5" x 49.5"
2222	22.5" x 22.5"	25.5" x 25.5"
2230	22.5" x 30.5"	25.5" x 33.5"
2246	22.5" x 46.5"	25.5" x 49.5"
2269	22.5" x 69.5"	25.5" x 72.5"
3030	30.5" x 30.5"	33.5" x 33.5"
3046	30.5" x 46.5"	33.5" x 49.5"
4646	46.5" x 46.5"	49.5" x 49.5"

## STEP 1

Consider natural light, sunshine and shade for overhead and eye-level placement. To optimize the view, the eye level is from 56" to 67" from the floor. Also consider attic obstructions including HVAC duct, gas/water pipes, and electrical devices.


## STEP 2

Determine type of light shaft desired.

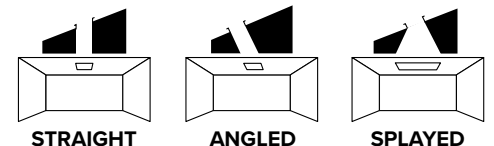


## STEP 3

Determine header setback (optional).

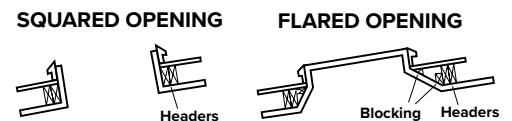


## INSTALLATION CROSS SECTION:

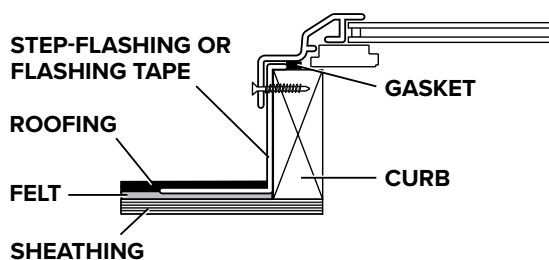


## STEP 4

Mark center of planned location on ceiling. Cut opening in ceiling with a drywall saw.


**IMPORTANT NOTE:** Rough openings should be made to the suggested sizes (see standard size chart).

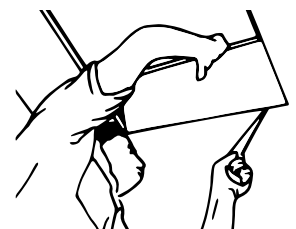

## BUILDING LIGHT TUNNEL

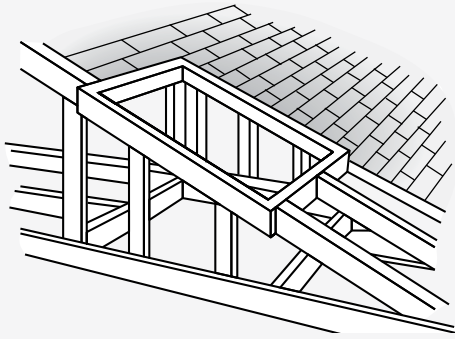


In structures that have a space between the ceiling and the roof such as an attic or crawl space, a light tunnel must be built. Nailers of 2" x 4" must be used to frame the opening between the roof header and the ceiling header. These will be used for attaching the finishing material, i.e., drywall, wall board, plywood, etc. The light tunnel should be wrapped with insulation for optimum performance. Select desired shaft and frame accordingly.

 Indicates 2"X4" Headers


### ANGLED SHAFT

An angled shaft is required when the skylight cannot be positioned directly above the area to be lighted because of existing pipes, electrical wiring, duct work, or roof limitations such as ridges or valleys. Locate the skylight as close to the desired areas as possible and then build the shaft on an angle to the ceiling opening.




### SPLAYED SHAFT

The splayed shaft is used to permit the greatest light exposure. This is done by making the ceiling opening larger than the roof opening.



### STRAIGHT SHAFT

A straight shaft from the roof to ceiling can be used. If the roof is flat, the ceiling and roof openings will be the same dimension. With a pitched roof, the ceiling opening will be slightly smaller than the roof opening.




### BUILT-UP ROOFS:

Carefully apply hot pitch or sealant to the surrounding area and base of curb flange. Cover with rock.

This information is supplied in good faith, without charge and recommendation as to its use. No guarantee of results of any use of the information is to be implied, since the conditions of use are beyond our control.


### STEP 5

In the attic, using a plumb bob or level, plumb up from the four corners in the ceiling to the underside of the roof sheathing. Mark them by driving nails through the roof.

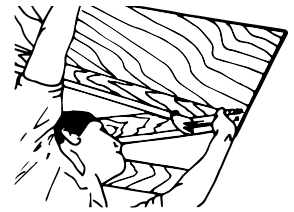


### STEP 6

Remove approximately 10" of the surrounding roofing material and nails from planned location. Mark perimeter of hole needed and cut opening through felt paper and roof decking.

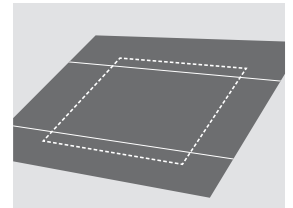


### STEP 7


Install headers based on size of opening and rafter pattern.



Opening fits between rafters, use single headers




One rafter cut, use double headers



Opening ends short of the rafter, install jack rafter

### STEP 8


Frame out the inside of the roof opening with double headers at the top and bottom of the opening. Butt 2x4's against the outside of the truss or rafters that frame the opening, and nail into place to provide extra stability when mounting the skylight. Any rafter or truss that runs through the skylight opening must be cut to meet local building codes.

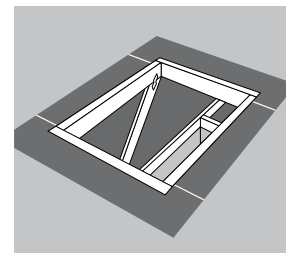

**IMPORTANT NOTE:** If the opening is too big, fill it in with the proper lumber to the suggested rough opening size or smaller.

### STEP 9


Build a curb using pressure-treated lumber (refer to chart for curb size). Center the curb over opening and toenail to the roof deck.

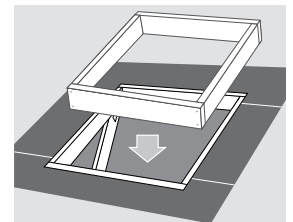

### STEP 10

To ensure a weather-tight installation, wrap entire curb using installation flashing tape.

**NOTE:** Install step flashing where local building code requires.

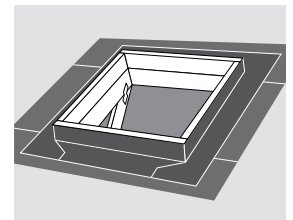

### STEP 11

Replace roofing material and secure skylight to curb using provided screws. Caulk over all exposed nails and screws.

**NOTE:** All Kennedy curb mount glass skylights already have a foam gasket applied to inside of the skylight - no sealant required.

