



Kennedy
SKYLIGHTS AND
SOLAR VENTILATION™

Beauty, Quality, Affordability

PRODUCT BROCHURE



www.KennedySkylights.com



TABLE OF CONTENTS



Glass | SUPERIOR PERFORMING GLASS SKYLIGHTS

Curb Mount / CMG.....	4
Self-Flashing / SFG	5
Self-Flashing Ventilating / SFVG	6
Self-Flashing Solar Ventilating / SFSVG	7
Accessories	8


3



Polycarbonate | HIGH IMPACT POLYCARBONATE SKYLIGHTS

Curb Mount / CM / CMA / HCMA.....	10
Self-Flashing Aluminum / SFA / SFAW / HSFAW	11
Self-Flashing / SF	12

9



Aluminum Curbs | PRE-BUILT CURBS

Non-Insulating / AC	13
White Wood Interior / ACW.....	13


13



Tubular Skylights | HIGHLY EFFICIENT DAYLIGHTING SYSTEM

Pitched Roof	15
Flat Roof	15
Curb Mount	15
Accessories.....	16

14



Solar Attic Fans | SOLAR POWERED ATTIC VENTING SYSTEM

Ultra-Low Profile.....	18
Roof Mount	19
Curb Mount	19
Gable Mount.....	19
Accessories.....	20

17

Welcome to the World of Kennedy Skylights

Kennedy Skylights offer Architects, Builders, Contractors, Distributors, and Roofing Dealers eco-friendly building options for increasing a home's aesthetic and intrinsic value – affordably and comfortably.

Since 1964, the Kennedy brand has been renowned for producing the highest-quality traditional skylights at an affordable price-point. Now in addition to our fine-quality LoE-240 glass and exceptionally durable polycarbonate skylights, we offer highly-versatile tubular skylights along with solar powered attic fans.

All products can be used without any reliance on man-made energy sources. All products are manufactured in the U.S. And all products meet the rigorous requirements of Florida Building Code standards.

Seven Reasons to Choose Kennedy Skylights and Solar Powered Attic Fans:

- 1 Numerous research studies have shown natural light can increase one's sense of wellbeing, energy, and mood
- 2 Natural light transmitted through Kennedy's skylights allows home furnishings, carpets, and room colors to appear truer than artificial light and without the risk of fading from UV rays
- 3 Kennedy's skylights illuminate rooms without the heat associated with incandescent bulbs, lowering both lighting and air conditioning costs
- 4 Kennedy's solar powered attic fans help prolong the lifespan of shingles and underlayment while reducing A/C loads – again saving money on utilities and repairs
- 5 Solar powered attic fans help equalize attic temperatures and reduce "hot spots" which can contribute to uneven snow melt and ice damming on eaves
- 6 Kennedy's skylights and solar powered attic fans can qualify homeowners for energy related federal and state income tax credits
- 7 All Kennedy products are manufactured in America, using the highest quality materials, and are Florida Building Code approved

With Kennedy products installed, homeowners can save money on their lighting, cooling, and repair bills while making their homes more attractive and inviting.



GLASS SKYLIGHTS

High Quality and Performance in an Affordable Glass Skylight

Our superior performing glass skylight is available in several models, glazing options, and standard sizes. Custom sizes are also available.

GLASS PERFORMANCE:

- Features LoE-240 coating with Argon-filled glass
- High performance ratings for light transmission, solar heat gain, U-factor, and fading transmission
- Two glazing options available: Tempered or High Impact (Hurricane Rated)
- Advanced technology dual-seal silicone system with patented stainless steel spacers

KEY FEATURES:

- .062 extruded aluminum for extra durability
- Welded corners for added strength and leak-proof protection
- Powder coated Bronze exterior, custom colors available
- Easy-release, continuous hinge secures skylight frame to curb for quick removal
- Hinge designed to divert water away from skylight
- Includes a full perimeter condensation gutter
- Fits any roof pitch and adapts to most roofing systems

3 MODEL CATEGORIES TO CHOOSE FROM:

- Self-Flashing Fixed Glass - 2", 4", or 6" high curb (SFG)
- Self-Flashing Ventilating Glass - 4" high curb (SFVG / SFSVG)
- Curb-Mount - standard (CMG) or hurricane model (MD-ICMG)


CERTIFICATIONS AND WARRANTY:

- Certified to meet or exceed performance criteria defined by AAMA/WDMA 1600/I.S. 2-200 (non-ventilating models)
- Florida Building Code Approved
- NAMI Participant - Quality Assurance Program
- 25-Year Non-Prorated Warranty




Skylight Glass	Visible Light Transmission	Solar Heat Gain	Winter U-Factor	Fading Transmission
Single, tint	68%	.73	1.11	.38
Double, tint	62%	.62	0.49 / 0.47	.32
Double, tint & LoE	57%	.56	0.35 / 0.31	.25
Kennedy Glass	40%	.25	0.30 / 0.26	.16

LoE-240 SKYLIGHT GLASS

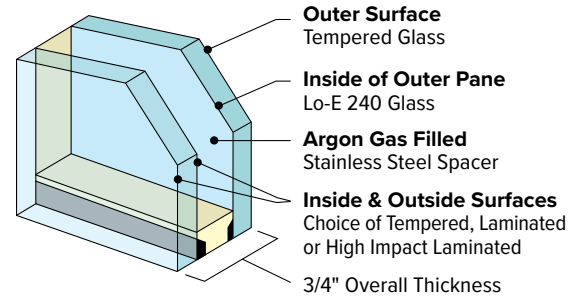

DUAL-SEAL SYSTEM

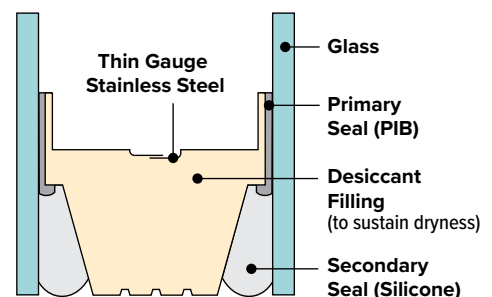

The success rate of our patented dual-seal system is 99.5% over 20 years based on actual seal failure reporting.



Curb Mount Glass Skylight

No Curb Included

KEY FEATURES:

- Meets the stringent requirements of the Florida Building Code
- High performance glass
- .062" extruded aluminum exterior with welded corners
- Oversized to fit most curbs

GLASS CHOICES:

- Tempered, LoE-240 Argon-Filled Glass
- High Impact, Hurricane Rated LoE-240 Argon Filled Glass

COLOR CHOICES AND OPTIONS:

- Bronze powder coated exterior
- Optional aluminum curb available - mounts on AC and ACW models (see curb section for details)

HURRICANE AND WIND ZONE APPROVED:

- MD-ICMG model has been tested and certified for all Hurricane and Wind Zones by Miami-Dade County

WARRANTY:

- 25-Year non-prorated limited warranty on insulated glass against seal failure
- 10-Year limited warranty against defects in workmanship and materials



Size Code	1430	1446	2222	2230	2246	2269	3030	3046	4646
Outside Curb Dimensions†	17.5" x 33.5"	17.5" x 49.5"	25.5" x 25.5"	25.5" x 33.5"	25.5" x 49.5"	25.5" x 72.5"	33.5" x 33.5"	33.5" x 49.5"	49.5" x 49.5"

†CMG models are manufactured 1" larger than the outside curb dimension to allow for flashing material.



Self-Flashing Fixed Glass Skylight

| 2" | 4" | 6" | Curbs 2" Curb: Min 3:12 Pitch 4" Curb: Min 2:12 Pitch
6" Curb: Min 0:12 Pitch

KEY FEATURES:

- Meets the stringent requirements of the Florida Building Code
- High performance glass
- Drywall return sized for both 1/2" and 5/8" drywall
- .062" extruded aluminum exterior with welded corners
- Integrated 4" flange with pre-drilled screw holes
- Replacement Sashes available

GLASS CHOICES:

- Tempered, LoE-240 Argon-Filled Glass (standard - no upcharge)
- High Impact, Hurricane Rated, LoE-240 Argon-Filled Glass

COLOR CHOICES:

- Powder coated bronze exterior
- Pre-finished white poplar wood interior
- Natural wood interior is optional
- Custom colors and sizes available

WARRANTY:

- 25-Year non-prorated limited warranty on insulated glass against seal failure
- 10-Year limited warranty against defects in workmanship and materials



Size Code	1430	1446	2222	2230	2246	4622	2269	3030	3046	4646
Rough Opening	14.5" x 30.5"	14.5" x 46.5"	22.5" x 22.5"	22.5" x 30.5"	22.5" x 46.5"	46.5" x 22.5"	22.5" x 69.5"	30.5" x 30.5"	30.5" x 46.5"	46.5" x 46.5"



Self-Flashing Ventilated Glass Skylight

| 4" | Curb

KEY FEATURES:

- High performing LoE-240 Argon-filled glass
- .062" extruded aluminum exterior with welded corners
- Extra-wide 4" flashing with pre-drilled screw holes
- Opens up to 8" - insect screen included
- Easy-release continuous hinge for quick replacement of sash
- Drywall return sized for both 1/2" and 5/8" drywall

LOE-240 ARGON-FILLED GLASS:


- Tempered Glass

COLOR CHOICES AND OPTIONS:

- Powder coated bronze exterior
- Custom exterior colors and sizes available
- Pre-finished white wood interior
- Natural wood interior also available
- Telescopic pole which extends 6' to 10'
- Optional Remote Control and Rain Sensor available

WARRANTY:

- 25-Year non-prorated limited warranty on insulated glass against seal failure
- 10-Year limited warranty against defects in workmanship and materials

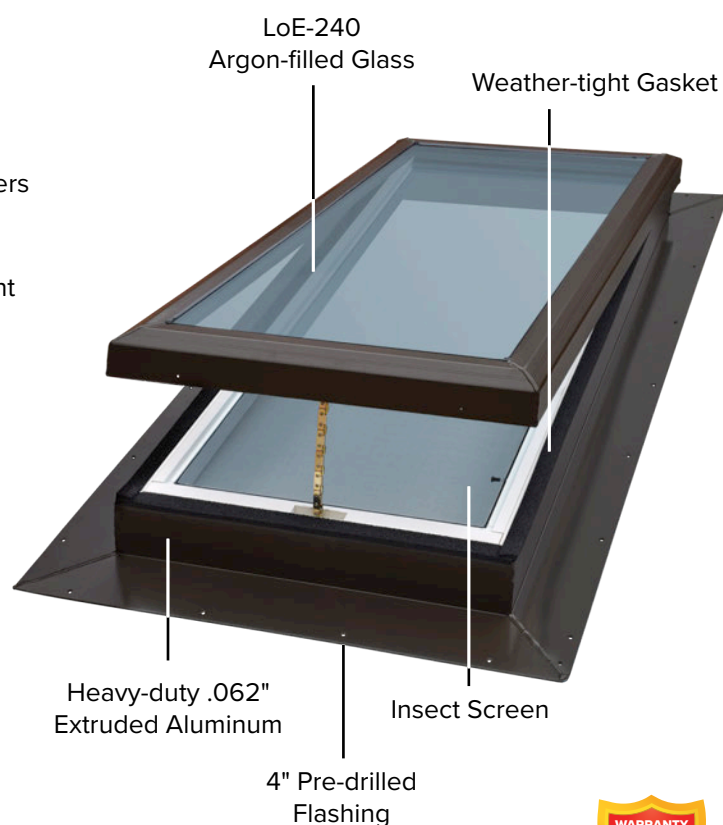

Size Code	2222	2230	2246	3030	3046	4646
Outside Curb Dimensions	22.5" x 22.5"	22.5" x 30.5"	22.5" x 46.5"	30.5" x 30.5"	30.5" x 46.5"	46.5" x 46.5"



Self-Flashing Solar Ventilated Glass Skylight

| 4" | Curb

KEY FEATURES:

- Solar powered opening system operated with a remote control
- Requires no wiring and includes a rain sensor
- Opens up to 8" - insect screen included
- High performing LoE-240 Argon-filled glass
- .062" extruded aluminum exterior with welded corners
- Extra-wide 4" flashing with pre-drilled screw holes
- Easy-release continuous hinge for quick replacement
- Drywall return sized for both 1/2" and 5/8" drywall

LOE-240 ARGON-FILLED GLASS:


- Tempered Glass

COLOR CHOICES AND OPTIONS:

- Powder coated bronze exterior
- Pre-finished white wood interior
- Can be manually operated using optional Telescopic pole

WARRANTY:

- 25-Year non-prorated limited warranty on insulated glass against seal failure
- 10-Year limited warranty against defects in workmanship and materials
- Qualifies for a 30% federal tax credit on both the model purchase and installation costs

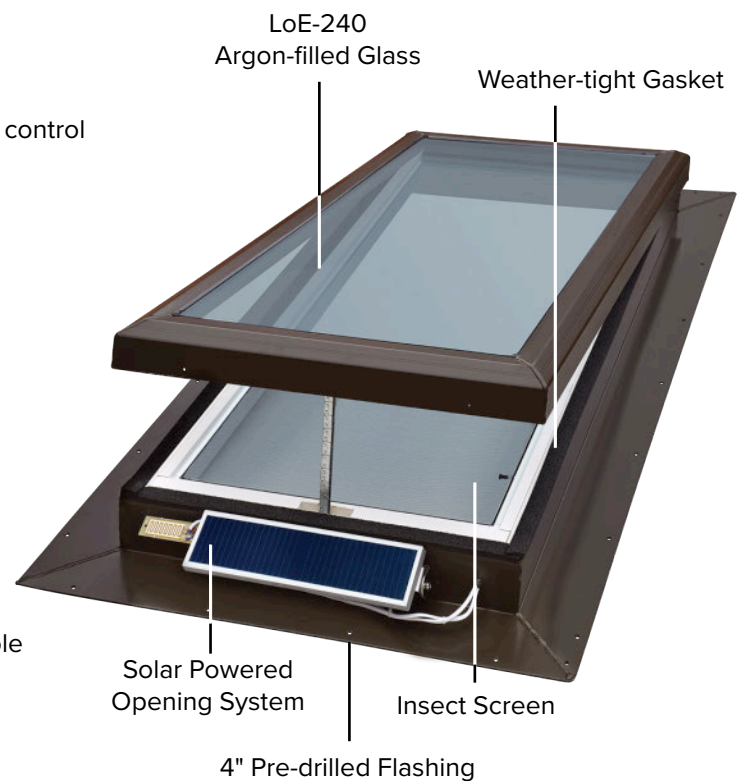

Size Code	2222	2230	2246	3030	3046	4646
Outside Curb Dimensions	22.5" x 22.5"	22.5" x 30.5"	22.5" x 46.5"	30.5" x 30.5"	30.5" x 46.5"	46.5" x 46.5"



Accessories for Glass Skylights

ELECTRICAL OPERATOR

- Powerful, completely motorized drive system
- RF remote adds extended control and functionality
- Capable of lifting our heaviest and largest skylight
- Features Power Protected Memory - eliminates the need to reset motor after a power-outage
- Rain Sensor automatically closes skylights upon detecting moisture
- 1-Year Warranty against defects in materials and workmanship



EXTENSION POLES

- Used in elevated settings
- Manually operated
- Easy-to-use with smooth-turning operation
- Telescopic pole adjusts from 6 to 10 feet
- Stores easily




HEX BALL ADAPTER / MANUAL OPERATION

- For use with our manual control rod when you have multiple vented skylights
- Attaches directly to the manual control on our vented skylights
- Fits into the operator on the skylight frame



STEP-FLASHING KITS

- Ensures that your Kennedy Skylight will be leak-proof
- Powder-coated Bronze for consistent finish that protects from corrosion
- Must be installed with Kennedy CM models to qualify for Warranty
- Includes header, sill and side pieces

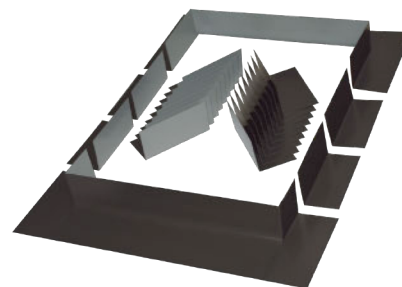



POLYCARBONATE SKYLIGHTS

High Durable, Low-Cost Alternative to Glass Skylight

Polycarbonate skylights are made from a co-extruded polycarbonate plastic sheet and are available in standard sizes to accommodate all roofing systems. We also manufacture two hurricane-rated models.

KEY FEATURES:

- Highly impact resistant - virtually unbreakable
- Sized to fit standard US truss and rafter framing
- Low profile co-extruded polycarbonate
- Energy efficient double-dome construction
- High clarity and light transmission
- Blocks harmful UV radiation
- Lightweight - easy to handle and install

POLYCARBONATE ADVANTAGE:

- 30-times more impact resistant than acrylic skylights
- 250-times more impact resistant than glass
- Resists temperature extremes from -60°F to +250°F
- Superior weathering performance
- 80% less yellowing than non co-extruded sheets

MODEL CATEGORIES TO CHOOSE FROM:


- Self-Flashing - no curb required (SF)
- Self-Flashing - 4" or 6" high curb with Styrofoam liner (SFA) or white wood interior (SAFW)
- Curb-Mount - standard (CM) or with aluminum deco ring (CMA)
- Hurricane Zone - Self-Flashing (HSFAW) or Curb-Mount (HCMA) with hurricane rated, welded aluminum ring
- MD-HCMA - certified by the Miami-Dade County building codes to be approved for all hurricane and HVHZ wind zones

CERTIFICATIONS AND WARRANTY:

- Certified to meet or exceed performance criteria defined by AAMA/WDMA 1600/I.S. 2-200
- Florida Building Code Approved for large missile impact
- NAMI Participant - Quality Assurance Program
- Class V2 Fire Rated
- 10-Year Limited Warranty against defects in workmanship and materials



BLOCKS HARMFUL UV RAYS

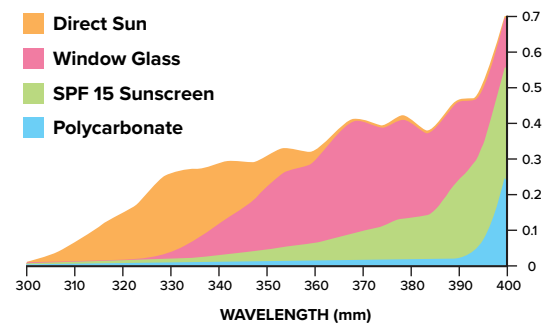

The Sentry Skylight co-extruded polycarbonate blocks out more harmful UV radiation than SPF 15 sunscreen!





Curb Mount Polycarbonate (CM / CMA)

Mounts to Kennedy AC, ACW or existing curb

- Co-extruded polycarbonate dome
- Bronze tinted outer with clear inner panel
- Pre-drilled screw holes for easy installation
- Available with aluminum deco ring (CMA) or without (CM)
- Florida Building Code Approved #15592.1
- 10-Year Limited Warranty



Hurricane Approved Curb Mount (HCMA / MD-HCMA)

Mounts to Kennedy AC, ACW or existing curb

- Co-extruded polycarbonate dome
- Hurricane rated .062" extruded welded aluminum ring in powder coated bronze
- MD-HCMA model has been tested and certified for all Hurricane and Wind Zones by Miami-Dade County
- Pre-drilled screw holes for easy installation
- Custom exterior colors and sizes available
- Bronze tinted outer with clear inner panel
- Approved for all wind zones
- 10-Year Limited Warranty
- Florida Building Code Approved



Size Code	1414	1422	1430	1446	2222	2230	2246	2269	3030	3046	4646
Outside Curb Dimensions[†]	17.5"x17.5"	17.5"x25.5"	17.5"x33.5"	17.5"x49.5"	25.5"x25.5"	25.5"x33.5"	25.5"x49.5"	25.5"x72.5"	33.5"x33.5"	33.5"x49.5"	49.5"x49.5"

– MINIMUM 3½ INCH CURB REQUIRED –

[†]CMG models are manufactured 1" larger than the outside curb dimension to allow for flashing material.



Self-Flashing Aluminum (SFA / SFAW)

| 4" | 6" | Curbs

- Co-extruded polycarbonate dome
- .062" extruded aluminum curb with welded corners
- Powder coated bronze exterior with predrilled screw holes
- Bronze tinted outer with clear inner panel
- SFA has energy-efficient Styrofoam liner - ideal for new construction
- SFAW has pre-finished white wood interior - perfect for re-roofing
- Class V2 Fire Rated; 10-year Limited Warranty
- Custom exterior colors and sizes available
- Florida Building Code Approved #15592.1



Hurricane Approved Self-Flashing (HSFAW)

| 4" | 6" | Curbs

- Co-extruded polycarbonate dome
- .062" extruded aluminum curb with welded corners
- Powder coated bronze exterior with pre-drilled screw holes
- Bronze tinted outer with clear inner panel
- Natural wood finish interior available
- Custom exterior colors and sizes available
- Pre-finished white wood interior - perfect for re-roofing
- Class V2 Fire Rated; 10-year Limited Warranty
- Florida Building Code Approved #15592.3



Size Code	1414	1422	1430	1446	2222	2230	2246	2269	3030	3046	4646
Rough Opening Dimensions†	17.5"x17.5"	17.5"x25.5"	17.5"x33.5"	17.5"x49.5"	25.5"x25.5"	25.5"x33.5"	25.5"x49.5"	25.5"x72.5"	33.5"x33.5"	33.5"x49.5"	49.5"x49.5"



Self-Flashing Polycarbonate Domed (SF)

No Curb Required

KEY FEATURES:


- Co-extruded polycarbonate dome
- Bronze tinted outer with clear inner panel
- Self-flashing for easy, leakproof installation
- 4" Pre-drilled integral nailing flange
- Mounts between shingles and roof decking

POLYCARBONATE ADVANTAGES:

- 30-times more impact resistant than acrylic skylights
- 250-times more impact resistant than glass
- Resists temperature extremes from -60°F to +250°F
- Superior weathering performance
- Resists effects of solar UV radiation

WARRANTY:

- Florida Building Code Approved #15592.5
- Class V2 Fire Rated
- 10-year limited warranty against defects in workmanship and materials

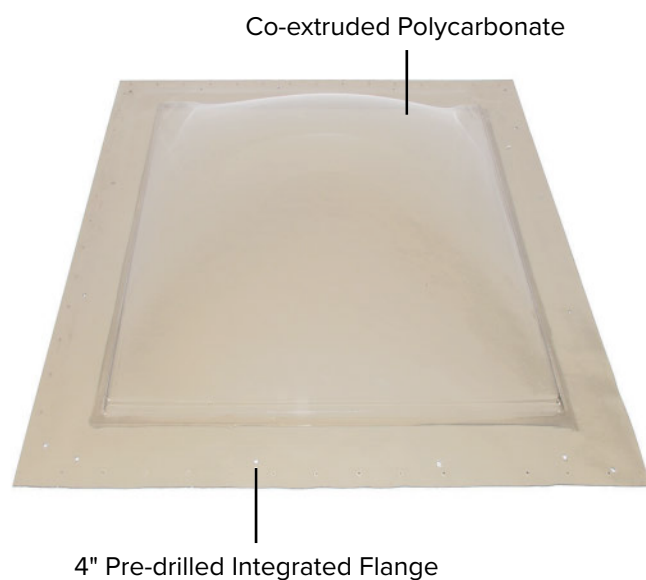

No Minimum Pitch Required. Not for Vertical Applications.											
Size Code	1414	1422	1430	1446	2222	2230	2246	2269	3030	3046	4646
Rough Opening Dimensions*	17.5"x17.5"	17.5"x25.5"	17.5"x33.5"	17.5"x49.5"	25.5"x25.5"	25.5"x33.5"	25.5"x49.5"	25.5"x72.5"	33.5"x33.5"	33.5"x49.5"	49.5"x49.5"



Aluminum Curbs

Saves Time and Simplifies Skylight Installation

Kennedy curbs work with many brands of plastic or glass curb-mount skylights and match our CMG, CM, CMA, and HCMA skylight models. Custom paint colors and sizes are available. All curbs have a 10-year limited warranty against defects in workmanship and materials.



6" CURBS NEEDED FOR FLAT ROOF APPLICATIONS

Non-Insulating Curb (AC)

| 4" | 6" | Curbs

- Curb for replacing flashing on existing skylights
- .062" extruded aluminum frame with welded corners
- Powder coated bronze exterior with pre-drilled screw holes
- Choice of 4" or 6" high curb



White Wood Interior Curb (ACW)

| 4" | 6" | Curbs

- Pre-finished, insulating white wood interior comes standard
- .062" extruded aluminum frame with welded corners
- Powder coated bronze exterior with pre-drilled screw holes
- Hand-selected, stain-grade wood interior also available
- Choice of 4" or 6" high curb



No Minimum Pitch Required. Not for Vertical Applications.											
Size Code	1414	1422	1430	1446	2222	2230	2246	2269	3030	3046	4646
Rough Opening Dimensions*	17.5"x17.5"	17.5"x25.5"	17.5"x33.5"	17.5"x49.5"	25.5"x25.5"	25.5"x33.5"	25.5"x49.5"	25.5"x72.5"	33.5"x33.5"	33.5"x49.5"	49.5"x49.5"



Kennedy Tubular Skylights

More Light Transmission with Lower Labor/Installation Costs

Tubular Skylights offer architects and homeowners affordable, day-lighting options in rooms where the installation of a window or adding additional windows isn't practical. Unlike traditional skylights, our tubular skylights use a "light pipe" to collect the sun's rays without transferring the sun's heat. And it's the light pipe technology that makes all of the difference!

HOW IT WORKS:

As sunlight enters through the skylight dome, the rays bounce downward inside the light pipe until emitted through the ceiling's diffuser, with very little light loss – even for light pipe tubes as long as 20 feet.

KEY FEATURES:

- Installs easily with no structural changes or wiring required
- Fits all roof types and slopes
- Available in pitched, flat, or curb mount models
- Designed to perform optimally from sunup to sundown
- Disperses light evenly while blocking 99% of harmful UV rays
- Condensation release dome prevents fogging due to humidity

SUPERIOR CONSTRUCTION:

- High-Impact Acrylic Dome – with stress collar to prevent dome from cracking under temperature fluctuations
- Commercial Grade Aluminum Flashing – heavy-duty, seamless, and leak proof
- Light Pipe – silver coated aluminum, 98% total reflectivity
- Prismatic or Soft White Diffuser – disperses light evenly without spot lighting or glare
- White Ceiling Trim Ring – blends into any decor

CERTIFICATIONS AND WARRANTY:

- Hurricane Tested and Approved
- Florida Building Code Approved
- ICC-ES Listed
- Qualifies for 30% Federal Tax Credits *(when paired with Solar Light Kit)*
- Limited Lifetime Warranty



"...installed 5 solar tubes with the light fixture, and all of them exceed our expectations...5 stars..."

– Paul B., Chula Vista, CA

Model	Coverage	Wattage	Max Tube Length
10"	up to 150 sf	up to 300 watts	18 feet
13"	up to 300 sf	up to 500 watts	20 feet
18"	up to 500 sf	up to 1,000 watts	20 feet

Tubular Skylights are Perfect for:

- Bathrooms
- Closets
- Laundry Room
- Hallways
- Stairwells
- Kitchen
- Family Room
- Home Office
- Loft
- Garage



Pitched Roof Tubular Skylight

| 10" | 13" | 18" | Models

- Powder-coated Black, Bronze or mill-finish aluminum flashing
- Forward sloping design allows for easy installation without the need for angle adapters
- Fits all roof slopes
- Installs on all roof types including shingle, wood shake, and tile
- Kit includes all components and hardware for a 4' installation
- Choice of prismatic or soft white diffusers - curved or flat styles
- Qualifies for 30% Federal Tax Credits *(when paired with a Solar Light Kit)*



Flat Roof Tubular Skylight

| 10" | 13" | 18" | 21" | Models

- Powder-coated Black, Bronze or mill-finish aluminum flashing
- Used for flat or low sloping roof applications
- Unique round shape allows for easy installation without disturbing much of roofing material
- Kit includes all components and hardware for a 4' installation
- Choice of prismatic or soft white diffusers - curved or flat styles
- Qualifies for 30% Federal Tax Credits *(when paired with a Solar Light Kit)*



Curb Mount Tubular Skylight

| 10" | 13" | 18" | 21" | Models

- Powder-coated Black, Bronze or mill-finish aluminum flashing
- Square shape allows for easy installation over pre-built curb
- Kit includes all components and hardware for a 4' installation
- Choice of prismatic or soft white diffusers - curved or flat styles
- Florida Building Code Approved #11743.1, #11743.2, & #11743.3s
- Qualifies for 30% Federal Tax Credits *(when paired with a Solar Light Kit)*






Tubular Skylight Accessories

ELECTRIC LIGHT KIT

- For use during extremely cloudy days or night time
- Single and dual bulb options available
- Use with CFL (compact fluorescent) or LED light bulbs



SOLAR POWERED LED LIGHT KIT

- Includes rechargeable batteries that charge during the day
- Illuminates between 10-12 hours at night with an auto shut-off feature
- Residential tubular skylight installations that include our Solar LED Light Kit are eligible for a 30% Federal Solar Tax Credit



DIMMER KIT WITH REMOTE CONTROL

- Available for 10", 13", and 18" models
- Remote controls the internal dimmer panel to be fully open, partially closed, or fully closed
- May be hard-wired using a momentary switch




EXHAUST VENT KIT

- Available for the 10" model only
- Perfect for bathrooms and laundry rooms
- Intake vent hidden from view by decorative trim ring
- Extremely quiet motor exhausts 125 cfms
- Flexible tubing provides various venting options
- May be installed in conjunction with the light kit



12" ANGLE ADAPTER/ELBOW

- For installations where a straight run of pipe is impossible
- Adjusts from 0 to 45 degrees for the 10" and 13" models
- Adjusts from 0 to 30 degrees for the 18" model

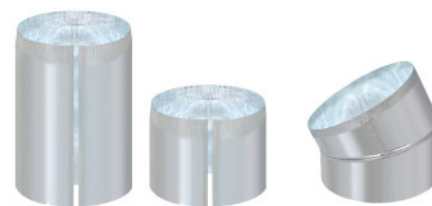

LIGHT PIPE EXTENSIONS

- Extra sections of light pipe available in 12" and 24" lengths
- Same highly reflective mirror finish as light pipe

FLASHING SKIRT AND TURRET EXTENSION FOR TILE ROOFS

- Flashing skirt available for 10", 13", and 18" models
- Turret extension is also available for higher profile S-tile roofs for 10" and 13" models





Kennedy Solar Attic Fans

Affordable Solution for Extending the Life Span of Roofs and HVAC Systems

The Kennedy Solar Attic Fan is a simple and environmentally sensible product that can protect your home and even save you money. Powered completely by free solar energy, this sleek and efficient attic vent is compact, quiet, and powerful! Attic fans significantly improve attic air circulation resulting in a healthy, energy efficient home. Our fans are one of the best in their class with the highest standards for quality and functionality.

BENEFITS OF ATTIC VENTING:

- Extends roof life by reducing heat build-up on roof shingles and underlayment
- In hot summer months, reduces AC load to lower energy bills
- In cold winter months, prevents ice damming
- Reduces attic moisture eliminating growth of mold and fungus - also minimizes wood rot and insulation damage

KEY FEATURES:

- Operates for free during the day using solar energy
- Low-profile unit blends seamlessly into roof line
- Water tight, will not leak, and is maintenance free
- Available in 3 mounting types: roof, curb, or gable
- Available in 4 sizes: 32, 35, 48, and 65 watts
- Fits any roof pitch and adapts to most roofing systems
- Easy installation with no structural changes required

SUPERIOR CONSTRUCTION:

- Solar Panel – adjustable to achieve optimal solar exposure
- Commercial Grade Aluminum Flashing and Housing – heavy-duty, seamless, and leak proof
- Direct Current Motor – long-lasting and quiet
- Fan Blade – precision balanced, 5-wing, corrosion resistant aluminum
- Stainless Steel Protective Animal Screen

CERTIFICATIONS AND WARRANTY:

- Hurricane Tested and Approved
- Qualifies for up a 30% Federal Tax Credit
- Limited Lifetime Warranty



Removes Heat and Moisture from Attic Spaces



Prevents Ice Damming



"I've had great luck with the fan so far in keeping my garage cooler than an unventilated garage... you have a customer for life because of your product and personal service."

– Craig A., Carson, CA

Model	Venting Capacity	CFM Output
32 Watt	up to 2,200 sf	up to 1,560 cfms
35 Watt	up to 2,400 sf	up to 1,599 cfms
48 Watt	up to 2,825 sf	up to 1,881 cfms
65 Watt	up to 3,350 sf	up to 2,105 cfms





Ultra Low Profile Roof Mount (Fixed Panel)

35 Watt

- Features a compact, roof-hugging design
- Seamless commercial grade aluminum hood and flashing
- Powder-coated inside and out to provide extra durability
- Available in 3 colors: Black, Bronze or Gray
- Fits all roof slopes including flat roofs
- Installs on all roof types including shingle, wood shake, metal and tile
- Fixed solar panel effectively stands up to hurricane and tornadic winds
- Easy installation - fully functional right out of box
- Qualifies for 30% Federal Tax Credit



Tile Profile Roof Mount (Fixed Panel)

35 Watt

- Seamless commercial grade aluminum hood and flashing
- Powder-coated inside and out to provide extra durability
- Available in 3 colors: Black, Bronze or Gray
- Housing sits higher to accommodate thicker tile or slate roofing
- Perfect solution for the popular S-style tile roofs
- Fixed solar panel effectively stands up to hurricane and tornadic winds
- Easy installation - fully functional right out of box
- Qualifies for 30% Federal Tax Credit



Ultra Low Profile Curb Mount (Fixed Panel)

35 Watt

- Features a compact, roof-hugging design
- Seamless commercial grade aluminum hood and flashing
- Powder-coated inside and out to provide extra durability
- Available in 3 colors: Black, Bronze or Gray
- Square shape allows for easy installation
- Installs over pre-built curb
- Fixed solar panel effectively stands up to hurricane and tornadic winds
- Easy installation - fully functional right out of box
- Qualifies for 30% Federal Tax Credit





Roof Mount (Adjustable Panel)

| 32 | 48 | 65 | Watts

- Seamless commercial grade aluminum hood and flashing
- Powder-coated inside and out to provide extra durability
- Available in 3 colors: Black, Bronze or Gray
- Fits all roof slopes including flat roofs
- Installs on all roof types including shingle, wood shake, metal and tile
- Features adjustable solar panel for optimal performance
- Easy installation - fully functional right out of box
- Florida Building Code Approved
- Qualifies for 30% Federal Tax Credit



Curb Mount (Adjustable Panel)

| 32 | 48 | 65 | Watts


- Seamless commercial grade aluminum hood and flashing
- Powder-coated inside and out to provide extra durability
- Available in 3 colors: Black, Bronze or Gray
- Square shape allows for easy installation
- Installs over pre-built curb
- Features adjustable solar panel for optimal performance
- Easy installation - fully functional right out of box
- Florida Building Code Approved
- Qualifies for 30% Federal Tax Credit



Gable Mount (Remote Panel)

| 32 | 48 | 65 | Watts

- Fan housing installs into home's existing gable opening
- Solar panel installs remotely on roof
- Fits all roof types and slopes including flat roofs
- Easy installation - fully functional right out of box
- Florida Building Code Approved
#13509.1, #13509.2, #13509.3
- Qualifies for 30% Federal Tax Credit

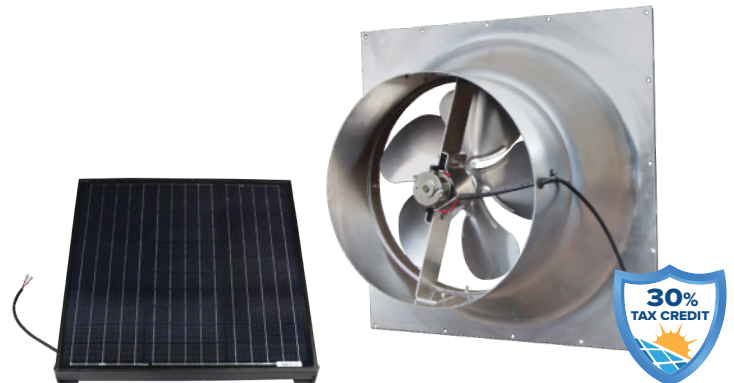



Solar Attic Fan Accessories

GARAGE EXHAUST KIT

- Converts roof or curb mount fan into a garage venting system
- Kit can be added to the 32, 35, 48, or 65 watt models
- Perfect for homes with an attic space above the garage
- Can also be used on sheds, barns or other work areas
- Optional Radiation Damper Kit available to minimize the spread of fire (required in some locations - check local building codes)

Kit Includes

- Adapter Sleeves and all Hardware
- 8 Feet of Flexible Duct Pipe
- Attractive White Ceiling Vent with Mesh
- All Hardware



THERMAL SNAP SWITCH

- Designed to turn on the fan when attic temperature reaches 80°F and turn off the fan when the attic temperature goes below 70°F
- Small device easily attaches to the fan motor



FIRE SAFETY SWITCH

- Designed to stop the spread of house attic fires by shutting down the fan
- Features a fusible link that will melt at 228°F
- Easily installed alone or in conjunction with thermal switch




REMOTE PANEL

- Used where there is limited sunshine available to installed fan
- Panel is installed away from fan assembly in a sunny area capturing the maximum amount of sunlight for optimal fan performance



FLASHING SKIRT AND TURRET EXTENSION FOR TILE ROOFS

- Flashing skirt is required for tile roof applications to ensure a weather-tight installation
- Easily installs over the fan flashing
- Turret extension is also available for higher profile S-tile roofs

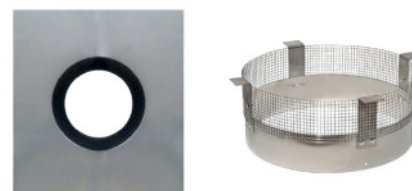

YOUR WORRY-FREE GUARANTEES



Kennedy Skylights offers some of the best industry warranties:

Glass: 25-Year Non-Prorated Warranty against seal failure

Polycarbonate: 10-Year Limited Warranty against defects in workmanship/ materials

Tubular Series: Limited Lifetime Warranty

Solar Attic Fans: Limited Lifetime Warranty



Kennedy Skylights' products have undergone rigorous testing conducted by National Certified Testing Laboratories (NCTL) of Orlando, Florida. Our products have been certified to meet or exceed the performance criteria defined in ASTM E-188699 and ASTM E-1996. In the uniform load structural test, Kennedy's Glass Skylights have survived wind gusts in excess of 200 mph. The Tempered LoE-240 Glass (not as strong as our High Impact models) has been tested to a Design Pressure of 80 PSF.



All Kennedy Skylights have received approval from the Florida Building Code. The HCMA and the MD-ICMG have been approved for High Velocity Hurricane Zones—Miami-Dade County NOA#16-0329.08. Visit www.kennedyskylights.com to see the approval documents.



Kennedy Skylights is a Certified Participant in the National Accreditation and Management Institute Inc. (NAMI), a Quality Assurance Program that complies with ISO/IEC 17020 and Guide 53.



Kennedy Skylights are proudly manufactured in America. We have production facilities in Sanford, Florida and Phoenix, Arizona to quickly ship anywhere in the U.S.A. to internationally.



Kennedy
SKYLIGHTS AND
SOLAR VENTILATION™

5294 Tower Way, Sanford, FL 32773

www.kennedyskylights.com

info@KennedySkylights.com fax 407.330.5125