



Impact Glass Skylights







Certifications

- Certified to meet performance criteria as defined by AAMA/CSA/WDMA 101/I.S. 2/A440
- Florida Building Code Approved
- Class V2 Fire Rated
- NAMI Participant (Quality Assurance Program)
- Miami-Dade County Approved (MD-ICMG only)









Kennedy Skylights manufactures high performing, quality glass skylights in both curb or deck mount models to accommodate all roof pitches and roofing systems. Our **Impact Glass Series** features a severe weather, hurricane glass.

IMPACT GLASS FEATURES:

- Dual pane, argon filled glass with LoE-240 coating
- Inner safety pane features two layers of strengthened glass with a plastic film inner layer designed to hold together when shattered
- ICMG is large missile approved for High Velocity, Hurricane Zone (HVHZ)
- Meets performance standards for air infiltration, design pressure, water penetration and load testing
- High performance ratings for light transmission, solar heat gain, U-factor, and fading transmission
- Advanced technology dual-seal silicone system with patented stainless steel spacers

KEY DESIGN FEATURES:

- .062 extruded heavy-duty aluminum frame
- Welded corners for added strength and leak-proof barrier
- Powder coated bronze exterior for additional durability
- Easy-release, continuous hinge secures skylight frame to curb for quick removal and designed to divert water away from skylight
- Full perimeter condensation gutter prevents water infiltration

WARRANTY:

- 25-Year non-prorated limited warranty on insulated glass against seal failure
- 10-Year limited warranty against defects in workmanship and materials





Impact Glass Skylights

ISFG Self-Flashing Fixed Glass

2" | 4" | 6" | Curbs





- LoE-240, argon filled impact glass hurricane rated
- Meets the stringent requirements of the Florida Building Code (FL15592.5)
- Choice of 2", 4" or 6" high curb
- Drywall return sized for both 1/2" and 5/8" drywall
- .062" extruded aluminum with welded corners
- Integrated 4" flange with pre-drilled screw holes
- Powder coated bronze exterior
- Pre-finished white poplar wood interior
- 25-Year non-prorated limited warranty on insulated glass against seal failure


ISFG MODEL SIZES

Size	1430	1446	2222	2230	2246	4622	2269	3030	3046	4646
Rough Opening							22.5"x 69.5"		30.5"x 46.5"	46.5"x 46.5"

ICMG Curb Mount Glass

No Curb Included



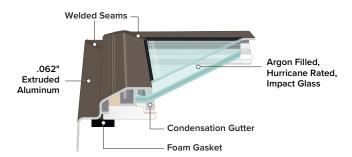

- LoE-240, argon filled impact glass hurricane rated
- Meets the stringent requirements of the Florida Building Code (FL15592.4)
- Large Missile Impact Approved for HVHZ
- .062" extruded aluminum with welded corners
- Oversized to fit most curbs
- Bronze powder coated exterior
- MD-ICMG model has been tested and certified for all Hurricane and Wind Zones by Miami-Dade County
- 25-Year non-prorated limited warranty on insulated glass against seal failure

ICMG MODEL SIZES

Size	1430	1446	2222	2230	2246	4622	2269	3030	3046	4646
Outside Curb [†]	17.5"x 33.5"		25.5"x 25.5"				25.5"x 72.5"		33.5"x 49.5"	49.5"x 49.5"

[†]CMG models are manufactured 1" larger than outside curb dimension to allow for flashing material.

